



## ▼ FETP SERIES ELECTRIC HYDRAULIC TORQUE WRENCH PUMP



### > CHARACTERISTICS

- High-efficiency 2 and 3 stages pump.
- External start-up switch for easier use of the remote.
- Automatic cooler increases pump reliability.
- Advanced Pressure control valve provides stable Pressure.
- Single phase brush-less motor provides high efficiency, low maintenance and longevity.
- 2 or 4 tools manifold available.
- Wireless remote available.

### > DIMENSIONS (MM)

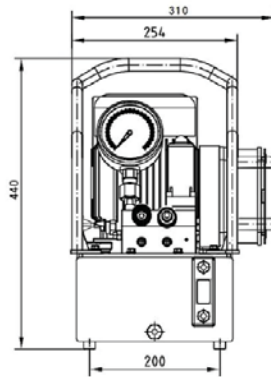

### > SPECIFICATIONS SHEET

Model Number	Oil Flow (in3/min)			Pressure (Psi)			Power HP	Usable oil capacity Gal	Input power	Weight Lbs	Dimensions (Inch) L x W x H
	High Pressure	Middle Pressure	Low Pressure	High Pressure	Middle Pressure	Low Pressure					
FETP-2	49	-	366	10 000	-	870	1,5	1,5	110V/220V - 50HZ/60HZ	60	16 x 13 x 18.5
FETP-2RW	49	-	366	10 000	-	870	1,5	1,5	110V/220V - 50HZ/60HZ	60	16 x 13 x 18.5
FETP-3	49	98	366	10 000	4640	870	1,5	1,5	110V/220V - 50HZ/60HZ	60	16 x 13 x 18.5
FETP-3RW	49	98	366	10 000	4640	870	1,5	1,5	110V/220V - 50HZ/60HZ	60	16 x 13 x 18.5
FETP-3M4	49	98	366	10 000	4640	870	1,5	1,5	110V/220V - 50HZ/60HZ	62	16 x 13 x 18.5
FETP-3M4RW	49	98	366	10 000	4640	870	1,5	1,5	110V/220V - 50HZ/60HZ	62	16 x 13 x 18.5